

60-65%.

20-30%,

40

( - ).

(«

»), « » -

(«

»),

« »

,

750 -


(

).

750

:

( .1).

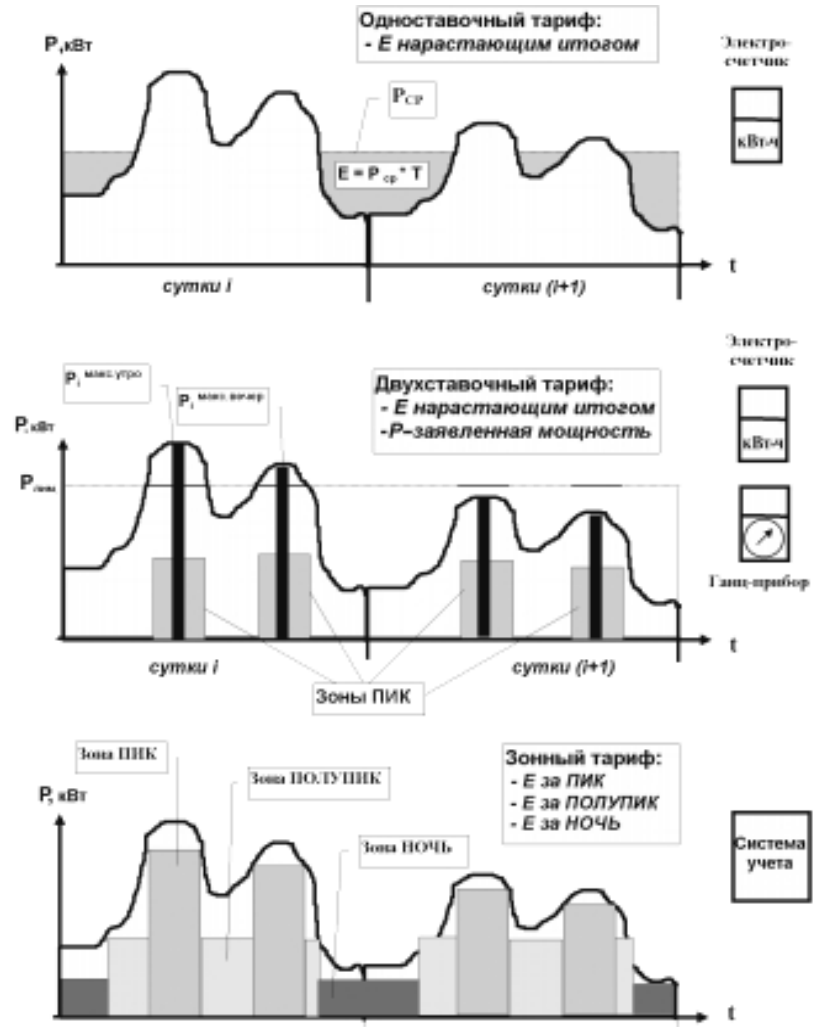

.1.

( )

« » :

)

,

)

(

,

),

,

)

(«

»),

)

,

,

)

,

«

»

,


-

,

«

»,

( .2).

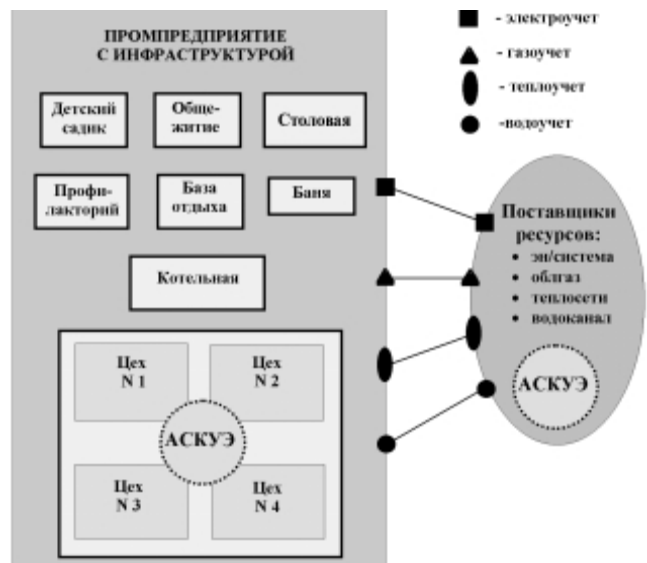

.2.

«

»

( ),


( .3):





( .5)

( )

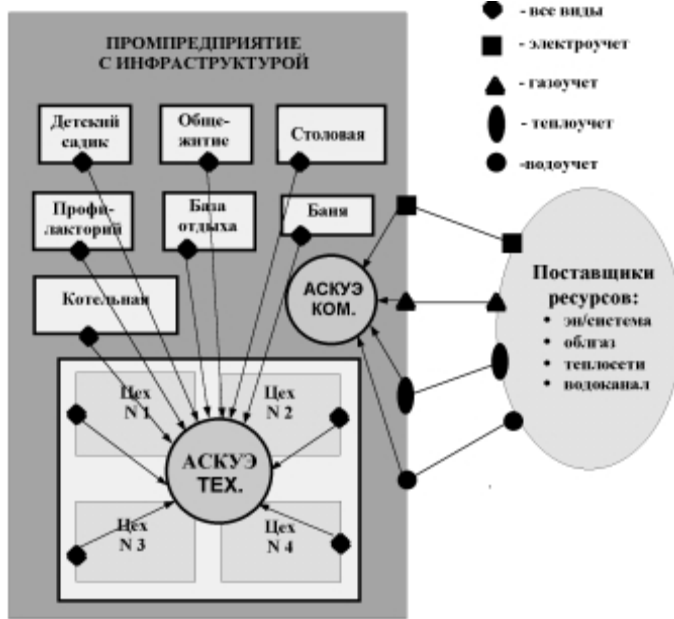


.5.

(

).


( . 3).

( . 6).

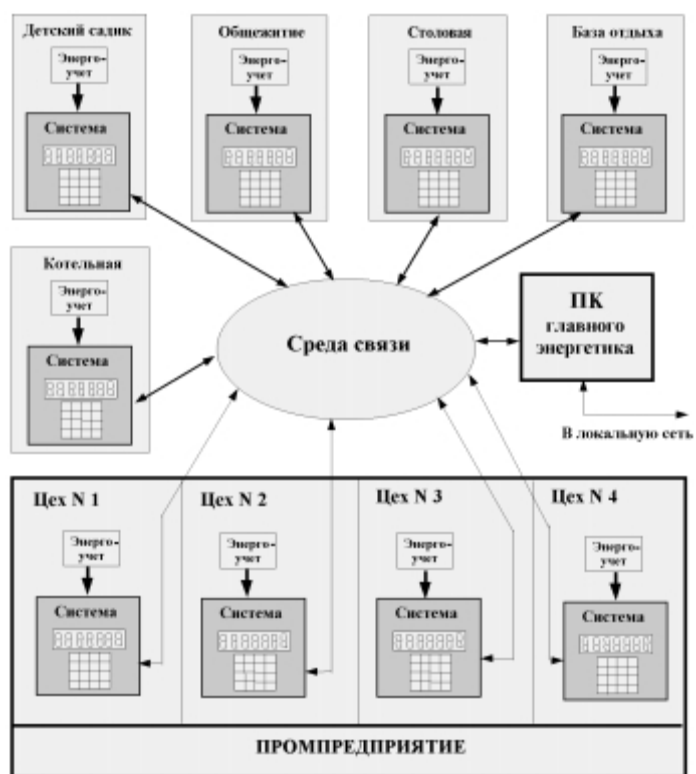

. 6.

(  
 ( )  
 ( )  
 ( )  
 ( )  
 / ( ) .7.

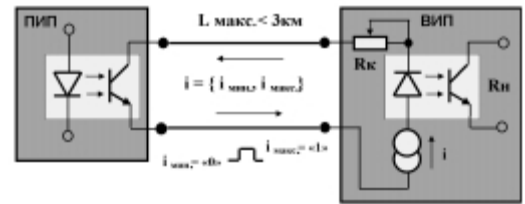

)  
 .7. ( )

$R$  ,  $f(x)$   
 ( .7 ).

$$i = f(x)$$

$R$

{0 - 20} , {4 - 20} A (  $i = 0$  ,  $i = 4$  A ) . {5 - 20} -  
 ).

$R$

$R$

$R$

( .7 ).

$i$  .  $i$  ,



« — »

(«0», «1»)

10 – 20 А.


3 .

( , ) , ( )


(

(CL)

( . 8).

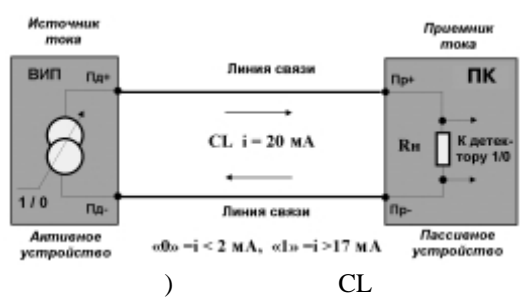

. 8.

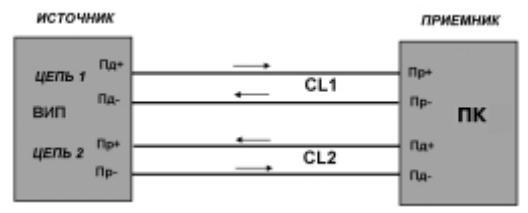

( )

( 3 )

( ).

CL

( . 8 ).

( 10, 40 , 80 А). , 2 А, –



$i = 20 \text{ A}$  ( 17 А, «1» «0» ( ).

– ( CL , ).

( – 9600 / . 7 ).

300 : 1200 / 2000 .

( ):  
 ( .8 ).  
 « 1 « » ( +/ -) 2  
 « » ( +/ -).  
 9600 /  
 500 ( ),  
 (EIA) RS-232C ( CCITT V.24).

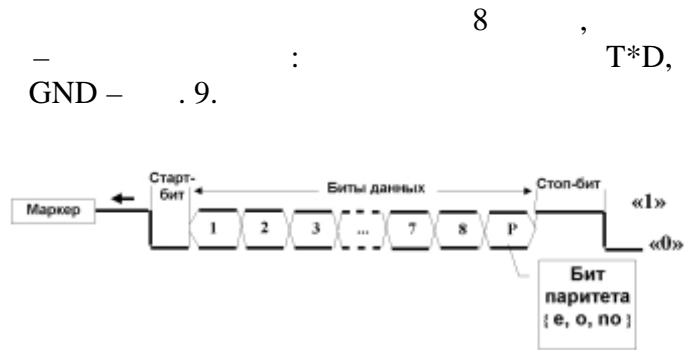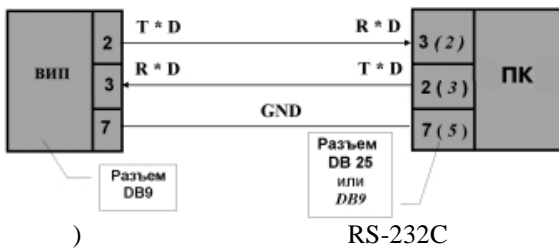





) RS-232C ) RS-232C  
 .9. RS-232C  
 DB9 RS-232C DB25. 9- 25-  
 C RS-232C 50 19200  
 / , 16 .

1200 / 900 ).  
 .9 ( ).

RS-422A

13 100 / 1300 ) (10 /  
 RS-485A, 10 RS-422A, 32  
 32

10).

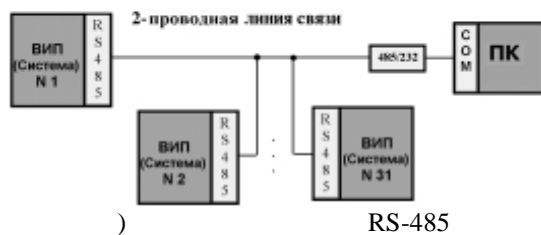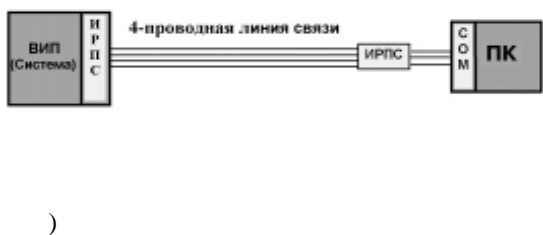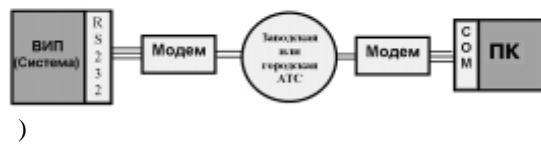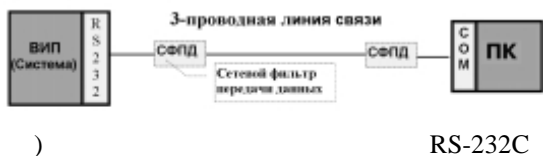

. 10.

RS-232C ( 900 )

RS-232C

(4, 8 16).

RS-232C,

( . 10 ).

( 3 )

( . 10 ).

RS-485

(

1200

)  
 10 ).

(

-

:

( ,

, )

-

( ,

- (

)

(  
—  
,

— , )

;

—

(1÷30

, , , , ,  
, ,

, , )

;

—

;

—

( , , )

;

—

( , - )

;

—

/

—

;

—

;

—

.

,

( , ).

, ,

( , ).

.

—

( , ),

( ).

, ,

,


.

.

,

.



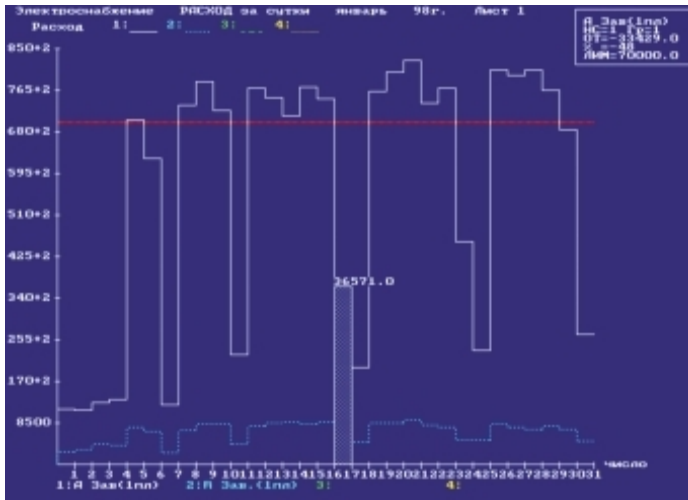

. 12.

15-30%

2-3

( . 13),

( )







